Fig. 1

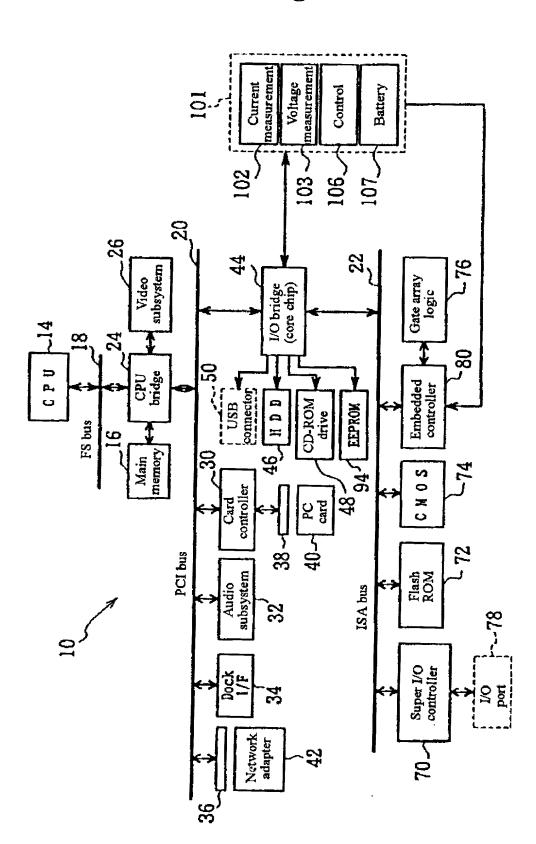
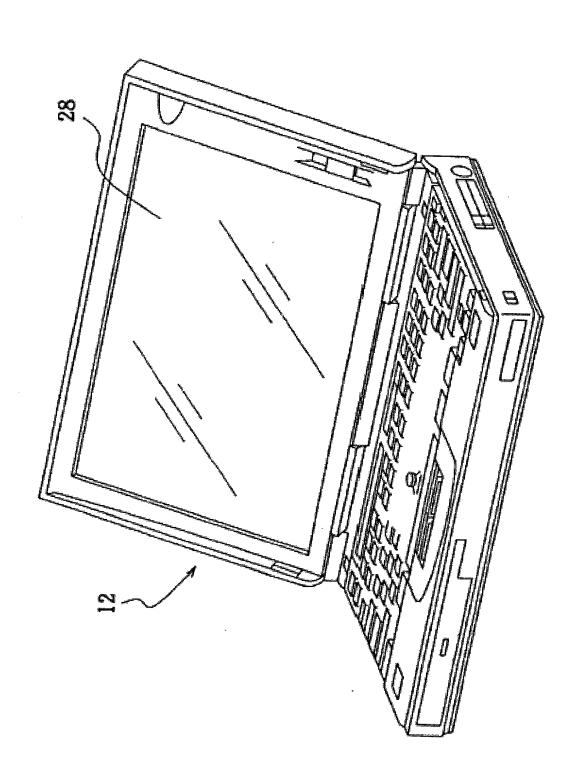


Fig. 2



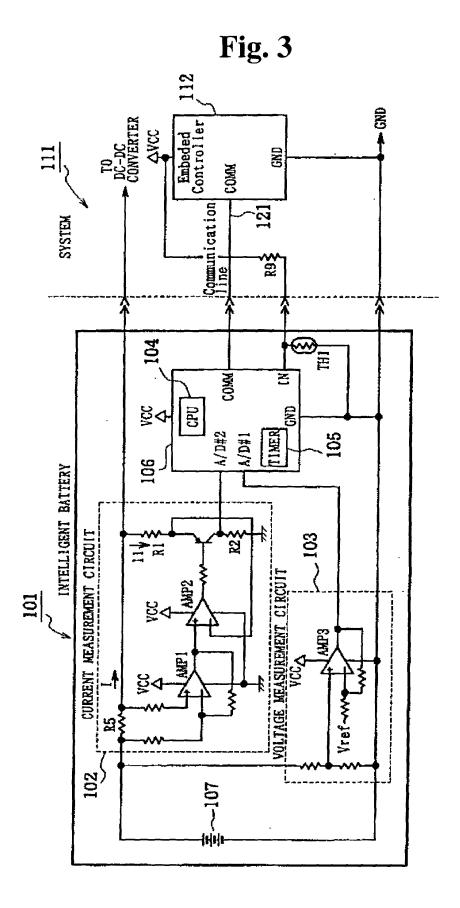


Fig. 4

| Bit           | Mode                     |          | Description              |
|---------------|--------------------------|----------|--------------------------|
| Bits 15 to 14 | Bits 15 to 14 Power mode | .;<br>00 | Normal operational mode  |
|               |                          | 01:      | N/A                      |
|               |                          | 10:      | Reconnection             |
|               |                          | ÷        | Soft-off mode            |
| Bits 13 to 0  | Consumption              | Input:   | Positive integer         |
|               | electric current         | Cnit:    | 0.1 mA                   |
|               | אמותם                    | Range:   | Range: 0 mA to 1638,3 mA |